

HR series

Proportional single axis thumb controls •
non contacting Hall effect technology • friction hold



DISTINCTIVE FEATURES

Friction hold - 2 versions: 11 detents along the travel or 1 detent at center

Single or dual analog outputs

Backlighting option

Electronics sealed to IP68

SIL2 capable



ENVIRONMENTAL SPECIFICATIONS

- Operating Temperature: -30 °C to +70 °C (-22 °F to +158 °F)
- Storage Temperature: -40 °C to +85 °C (-40 °F to +185 °F°)
- Electronics sealed to IP68 according IEC 60529
- EMC Immunity Level: EN61000-4-3 and ISO 11452-2 (100 V/m)
- EMC Emissions Level: EN61000-6-3: 2001
- ESD: 16KV according to EN61000-4-2
- Shock resistance : 50 g during 11 ms (version with 11 detents)
- Salt spray : IEC 512-6, test 11f



ELECTRICAL SPECIFICATIONS

- Supply Voltage Range: 5 VDC $\pm$ 0.50 VDC
- Reverse Polarity Max: -10 VDC max
- Overvoltage Max: 20 V
- Consumption: 11 mA max (single output), 22 mA max (dual output)
- LED supply : 6 VDC 10 mA



GENERAL SPECIFICATIONS

- APEM SAS patented design
- Detent Operating Force:
1.75 N $\pm$ 0.5N (with 11 detents); 2.5 N $\pm$ 0.5 N (with 1 detent)
- Mechanical Angle of Movement: $\pm$ 35°
- Expected Life : 100,000 lifecycles
- Mass/Weight : 11 g $\pm$ 2 g (0.4 oz $\pm$ 0.07 oz)

The company reserves the right to change specifications without notice.



HR series

Proportional single axis thumb controls •
non-contacting Hall effect technology • friction hold




MATERIALS

- Body: Polyamide
- Wheel: Polyamide
- Electronics sealing : epoxy
- Connector : polyester (Molex 0510210700)
- Multiwire lead AWG28



MOUNTING

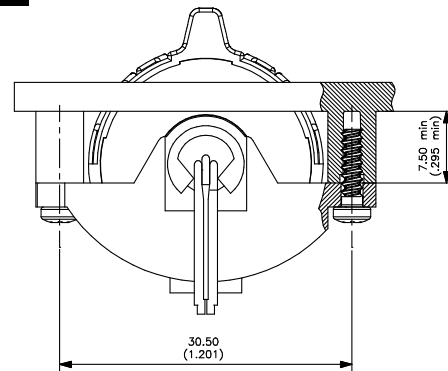

CONNECTIONS

SINGLE OUTPUT WITHOUT BACKLIGHTING

PIN	FUNCTION	COLOR
1	Power supply: +VDC 5 V	Red
2		
3		
4		
5	Output	
6		
7	Ground 0V	Black

SINGLE OUTPUT WITH BACKLIGHTING


PIN	FUNCTION	COLOR
1	Power supply: +VDC 5 V	Red
2		
3		
4		
5	Output	White
6		
7	Ground 0 V	Black

DUAL OUTPUT WITHOUT BACKLIGHTING


PIN	FUNCTION	COLOR
1	Power supply: +VDC 5 V	Red
2		
3		
4		
5	Output 2	Green
6	Output 1	White
7	Ground 0 V	Black

DUAL OUTPUT WITH BACKLIGHTING

PIN	FUNCTION	COLOR
1	Power supply: +VDC 5 V	Red
2		
3		
4		
5	Output 2	Green
6	Output 1	White
7	Ground 0 V	Black



Wiring harness with multiwire leads
AWG28 - Length 140mm (5.51in)

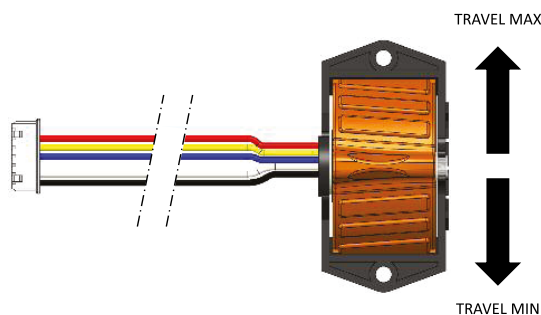


APEN




HR series

Proportional single axis thumb controls •
non-contacting Hall effect technology • friction hold


WHEEL WITH 1 TAB - OPTION S

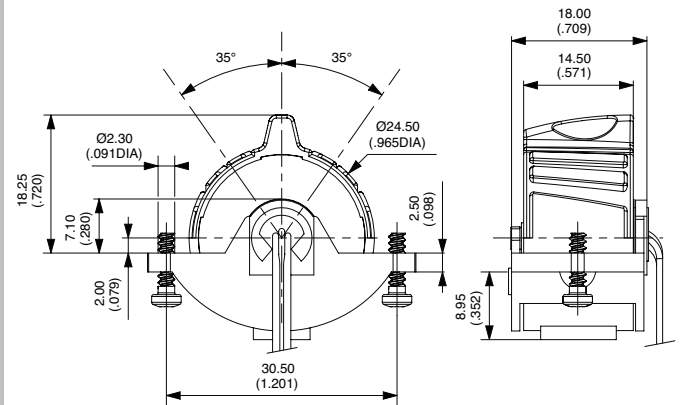

REVERSED WHEEL WITH 1 TAB - OPTION G

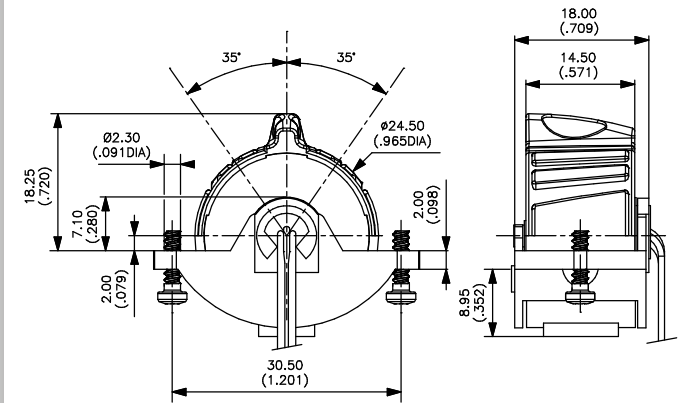


WHEEL WITHOUT TAB - OPTION L

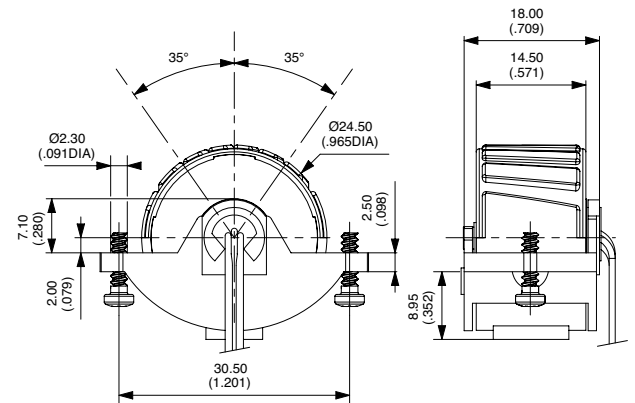


Proportional single axis thumb controls •
non-contacting Hall effect technology • friction hold



VOLTAGE OUTPUT OPTIONS

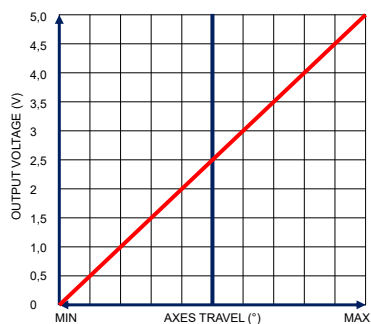


A Single 0 V to 5 V

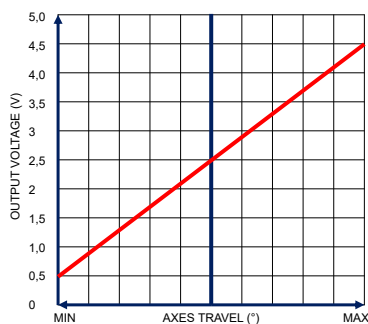


B Single 0.5 V to 4.5 V


— Output 1
— Output 2

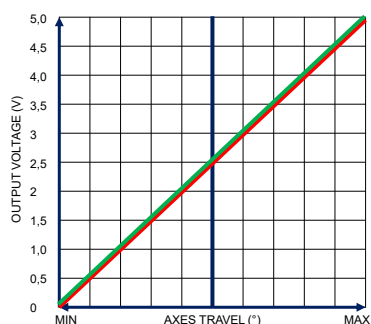


C Dual 0 V to 5 V

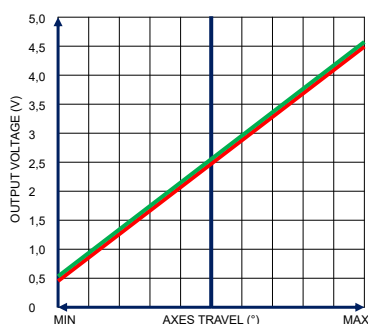

D Dual 0.5 V to 4.5 V

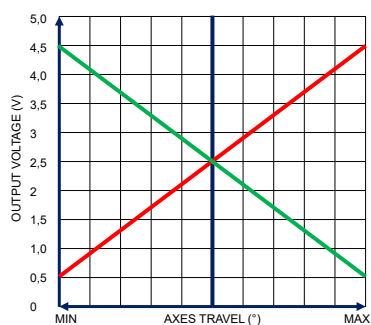

E Inverse dual 0.5 V to 4.5 V

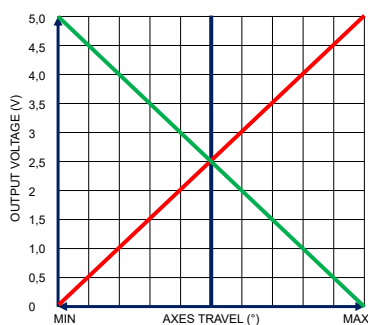

F Inverse dual 0 V to 5 V

Note: The output voltage cannot be superior to the power supply voltage.
For 0 V to 5 V versions, the power supply should not be lower than 5 V.