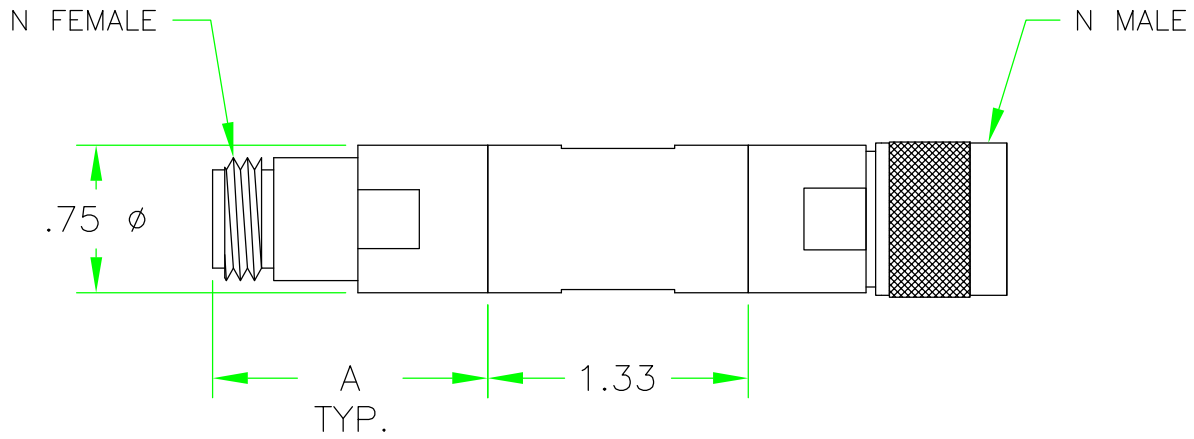

CONNECTOR	DIM. A ±.03
SMA MALE	1.41
SMA FEMALE	1.30
BNC MALE	1.59
BNC FEMALE	1.65
TNC MALE	1.59
TNC FEMALE	1.65
N MALE	1.32
N FEMALE	1.40
7/16 MALE	2.32
7/16 FEMALE	2.24
4.1/9.5 MALE	1.28
4.1/9.5 FEMALE	1.40
4.3/10 MALE	1.28
4.3/10 FEMALE	1.47

*NOTE : INSERT ATTENUATION VALUE i.e. 006 = 6dB

REV	ECN	DATE	BY	APPR
–	ISSUED	12–15–15	JZ	TEZ

JFW INDUSTRIES, INC.

www.jfwindustries.com PH: 317–887–1340

MATERIAL

PROPRIETARY INFORMATION

FINISH

ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES

MODEL 50FH–XXX–5 (*)

SCALE FULL

TOLERANCES .XX±.010 .XXX±.005 XX°±.5°

DESCRIPTION

5 WATT FIXED ATTENUATOR

DWG # 092–8508