


WAT-910HX MBD (G3.6) 1/3" Super High Sensitivity Miniature Board Camera

Ultra-compact design only 23 x 23mm for limited space and embedded application

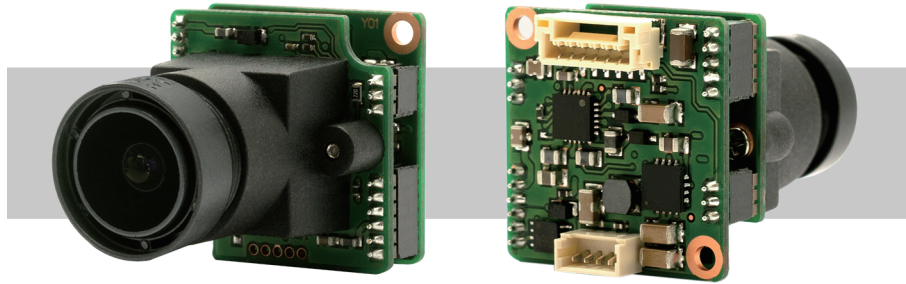


*NO CE & FCC

Key features

- Min. illumination 0.00009 lx F2.0 (AGC ON=48dB, Shutter=x8)
 - Advanced setting available by OSD (On Screen Display) through an optional remote control
 - Build-in M12 lens G3.6 (f=3.6mm F2.0), Various Optional M12 lenses available
- ※Glass lenses and pinhole lens are not interchangeable

Dimensions

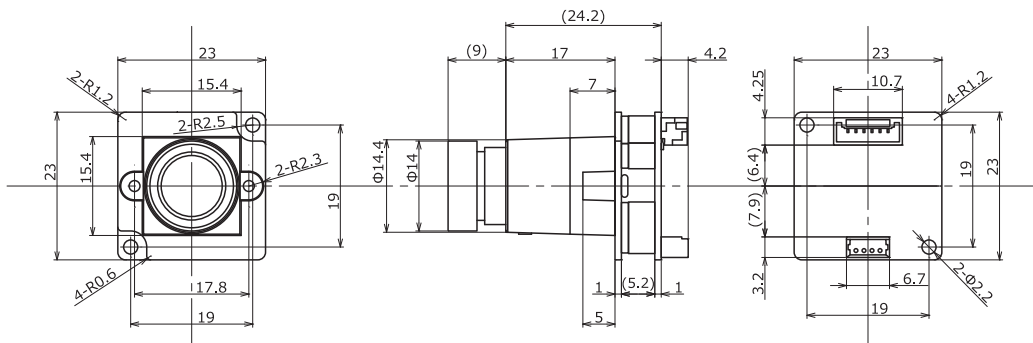


Specifications

Video standard		EIA	CCIR
Pick-up element		1/3 inch interline transfer CCD image sensor	
Number of effective pixels		768(H) × 494(V)	752(H) × 582(V)
Unit cell size		6.4μm(H) × 7.5μm(V)	6.5μm(H) × 6.3μm(V)
Synchronizing system		Internal	
Scanning system		2:1 interlace	
Video output		Composite video, 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 570TVL (Center)	
Minimum illumination		0,00009 lx F2.0 (AGC ON=48dB, Shutter=x8)	
S/N		More than 50dB (AGC OFF=6dB, γ=0.45, Shutter=OFF, NR=ON)	
Function settings		OSD : Remote controller	
AE mode	Fixed	x2, x4, x8, x16, x32, x64, x128, x256 (field)	
		1/60, 1/120 sec.	1/50, 1/100 sec.
	EI	1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 sec.	
AGC	ON	0 - 48dB (Max. 6 - 48)	
	OFF	-	
MGC		6 - 48dB (6dB step)	
Gamma characteristics		γ=0,45	
Video level		Adjustable	
Noise reduction		3D+2DNR ON Level adjustable	
Wide dynamic range		D-WDR OFF/ON Level adjustable	
Lens iris		-	
Back light compensation		BLC, HSBC	
White blemish correction		Up to 64 pixels	
Sharpness		Level adjustable	
Defog		OFF/ON Level adjustable	
Digital zoom		ZOOM (x1 - x256), PAN/TILT	
Privacy mask		15 masks	
Mirror image		OFF, V-FLIP, H-FLIP, HV-FLIP	
Freeze		-	
Motion detection		OFF/ON Select from 96 detection areas	
Neg.image		-	
Interface		4P connector (Composite Video, Power in), Remote control (RC-01)	
Power supply		DC+5V - 12V	
Power consumption		0.75W/150mA (DC+5V), 0.78W/65mA (DC+12V)	
Operating temperature		-10 - +50°C	
Storage temperature		-30 - +70°C	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		M12 P=0.5	
Standard lens		M3620BC-12 (f3.6 F2.0)	
Weight		Approx. 14g	
Accessories		4P cable	

Accessories Options

- Miniature lenses
- 2520BC-12
 - 2920BC-12
 - M3620BC-12 (Standard)
 - 0625BC-12
 - 0820BC-12
 - 1220BC-12
 - M1616BC-12
 - 2540EX014-M12

WAT-910HX MBD (G3.6)

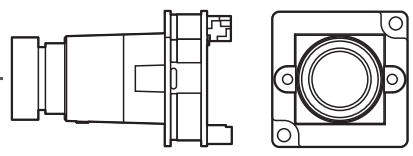

- Extenders
- EX005-M12-2
 - EX010-M12-2

- Camera housing
- CH-01


- Cable with connectors
- CB-01

- Remote control
- RC-01

- Cable
- 4P cable (300mm)

- Power supply adaptors
- SWI12-12-N-P5
 - SWI12-12-E-P5

- Cables
- 1.5C2V (BNC/BNC)
 - 3C2V (BNC/BNC)
 - 3C2V (BNC/RCA)

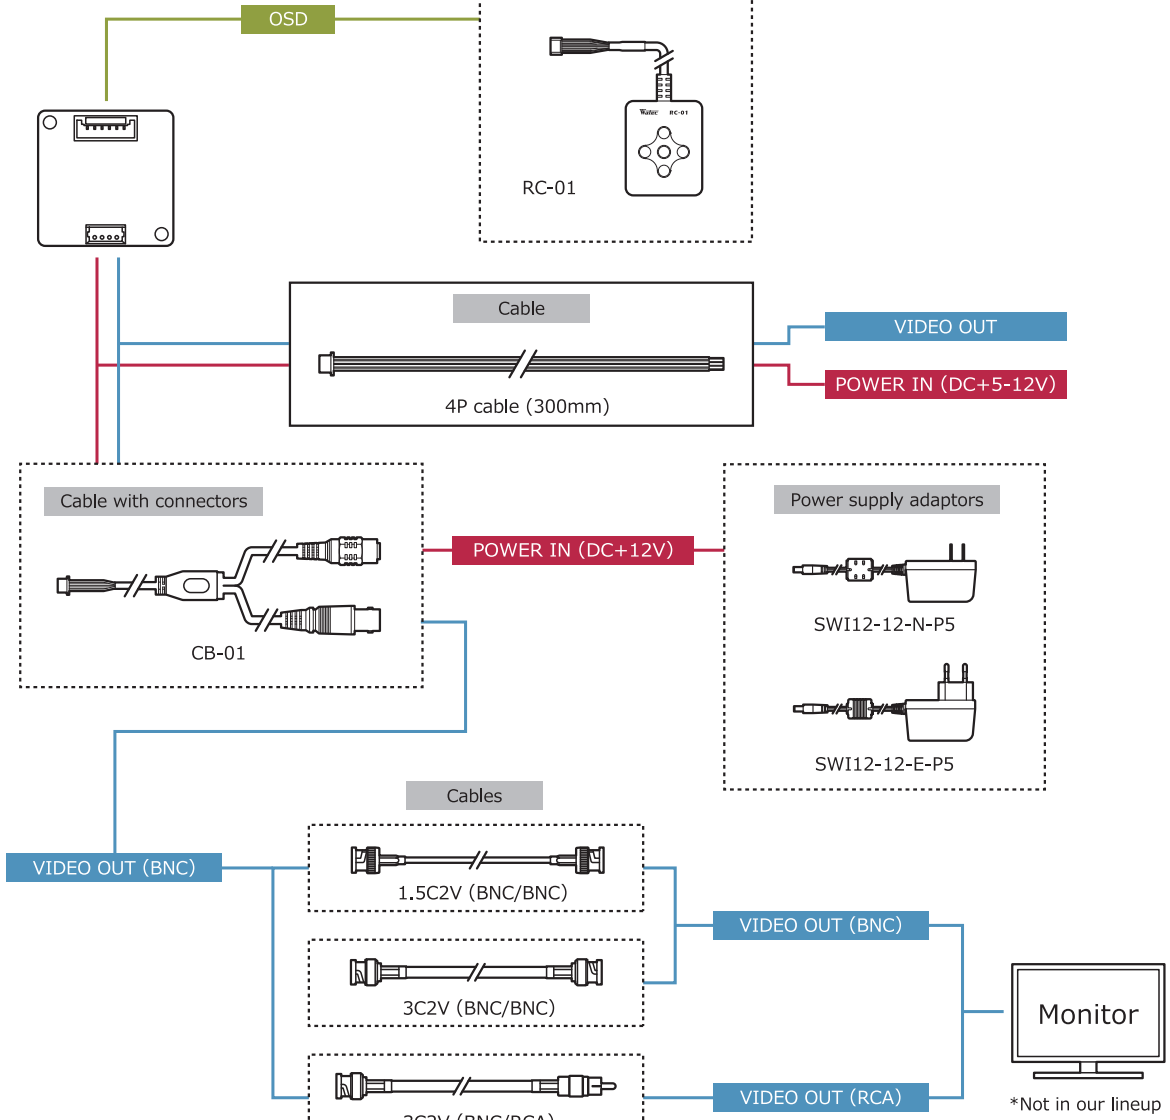

*Not in our lineup